

WALL

DUO-PANELS

Double the visual and auditory impact with our Duo-Panels, featuring two ArtFelt™ panels seamlessly bonded into one cohesive piece. The dual-panel design not only enhances the ability to customize colors but also adds depth to your space, creating a striking visual dimension. Beyond aesthetics, Duo-Panels amplify noise reduction, making them the perfect solution for spaces that demand both style and acoustical performance

Available in numerous Duo-Cut or Duo-Engraved patterns.



DUO-CUT PATTERNS

PATTERNS

Duo-Panels are 18mm thick and available in sizes of 47.5" x 95" or 47.5" x 118.75". With options like Duo-Cut Panels and Duo-Engraved Panels, you can explore techniques and various patterns. The unique ability to customize both the front and backer panels ensures your Duo product perfectly aligns with your aesthetic vision.


48" x 120" panels available in select colors.



ARROW 01




ARROW 02

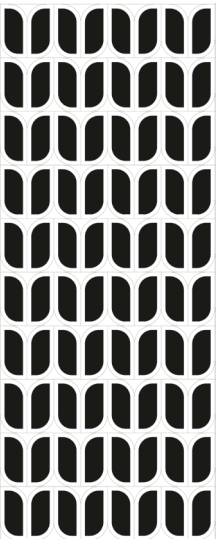


BLOOM



CARTOON

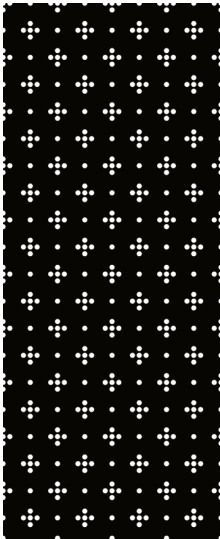


DOT FLOWER

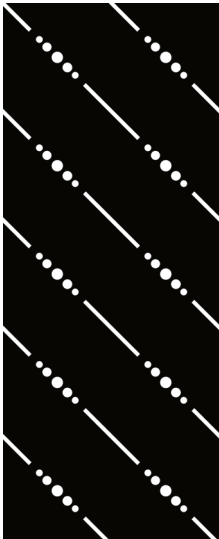


DOT & DASH




FUNFETTI

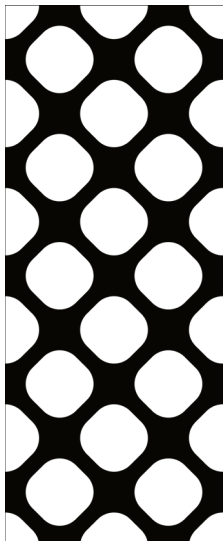


GRATE

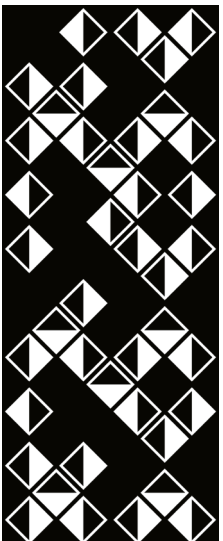


KITE

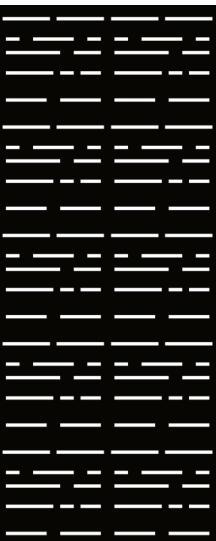


MATRIX

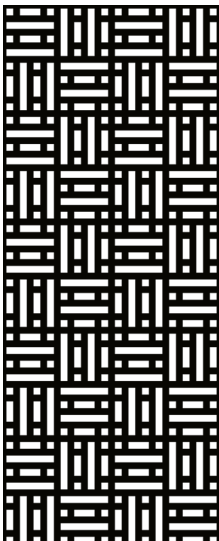


MOSAIC 02

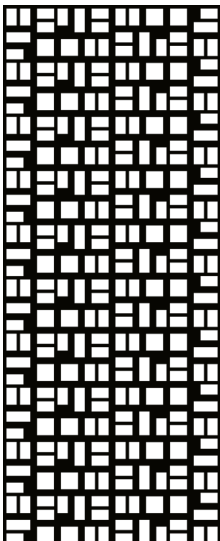

MOSAIC 03

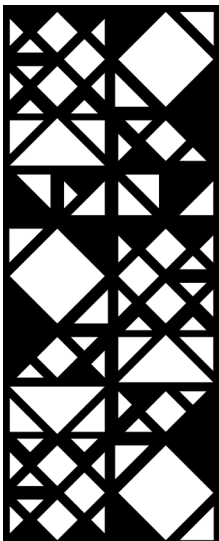


MOSAIC 04

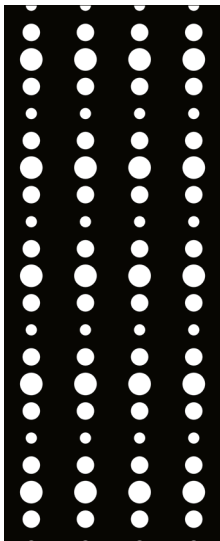


RAIN DOTS




RIPPLE

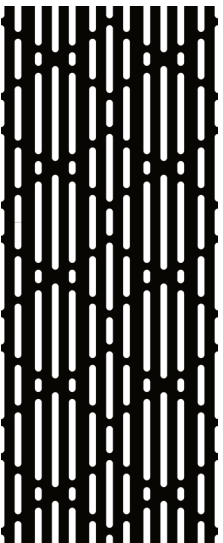


RUNWAY

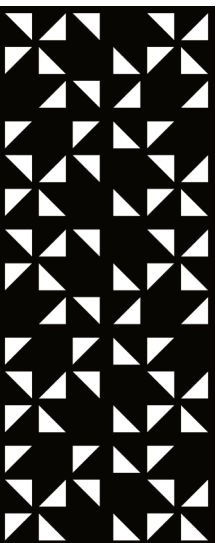


SHATTERED 02

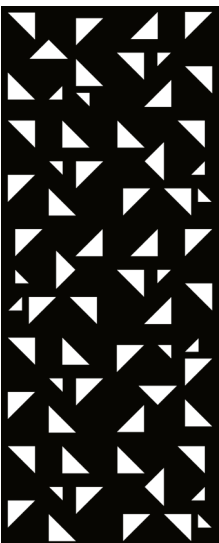

SHATTERED 01

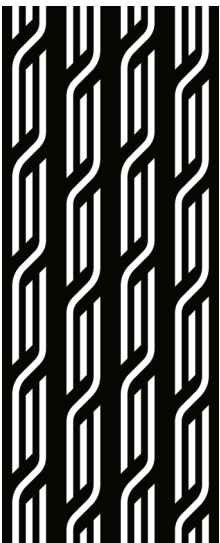

TREAD

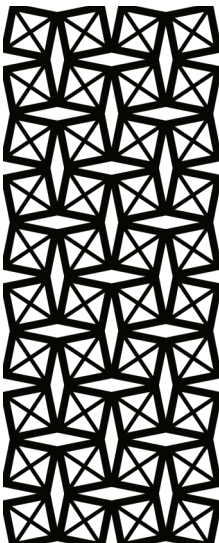


X-FACTOR

DUO-ENGRAVED PATTERNS


PATTERNS

Duo-Panels are 18mm thick and available in sizes of 47.5" x 95" or 47.5" x 118.75". With options like Duo-Cut Panels and Duo-Engraved Panels, you can explore techniques and various patterns. The unique ability to customize both the front and backer panels ensures your Duo product perfectly aligns with your aesthetic vision.


48" x 120" panels available in select colors.

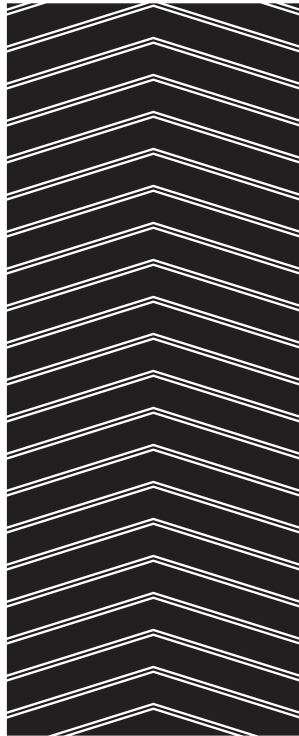


CHEVRON

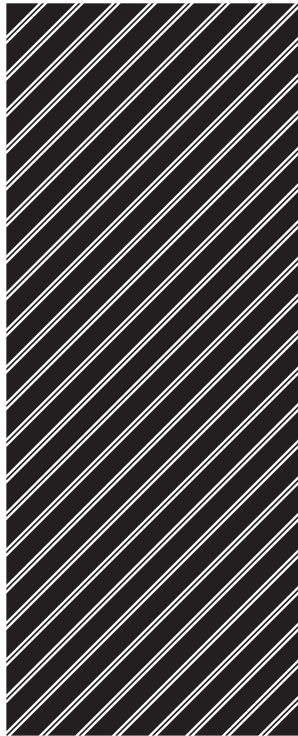


DIAGONAL

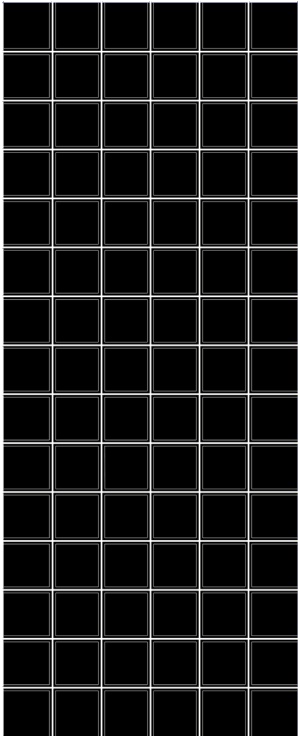


FRAMEWORK

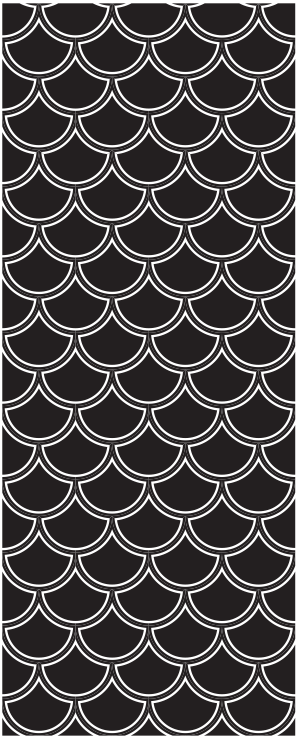


KOI

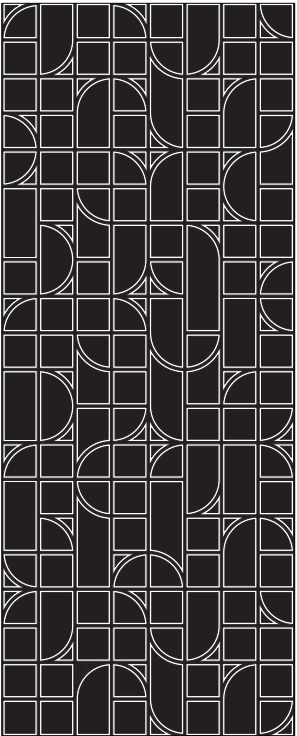


LUNAR

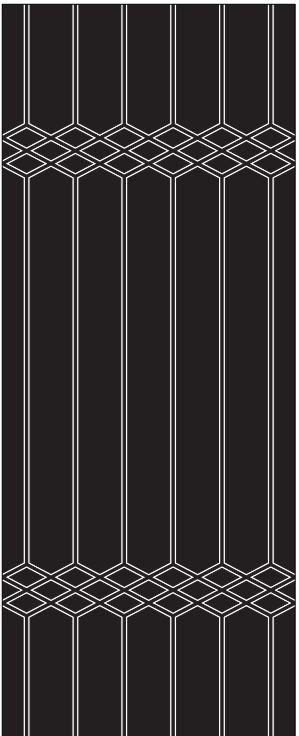


PRISM

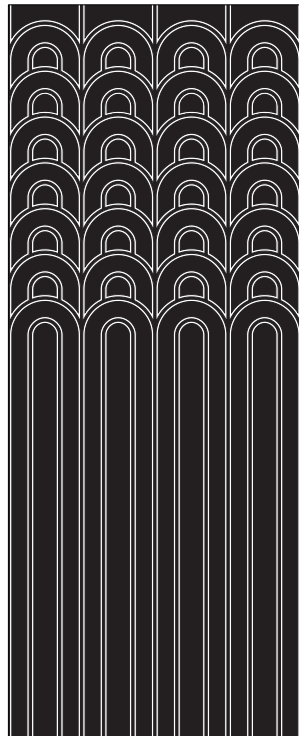


RAINBOW

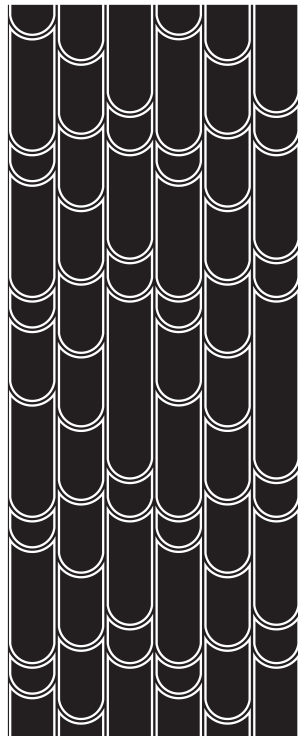


SCALLOP

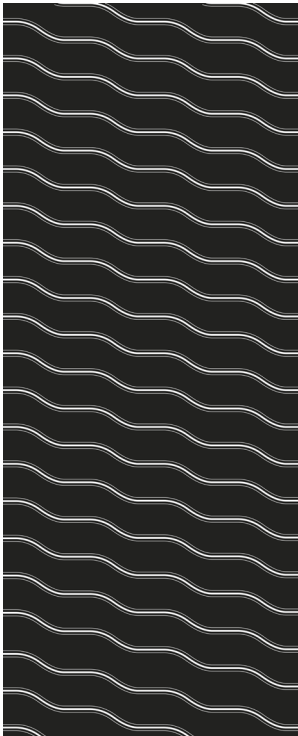


SLIDE

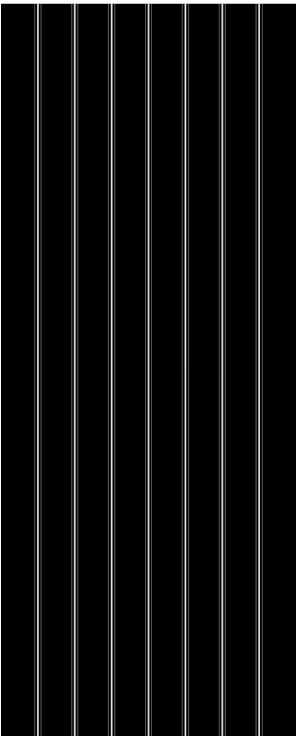

THREAD

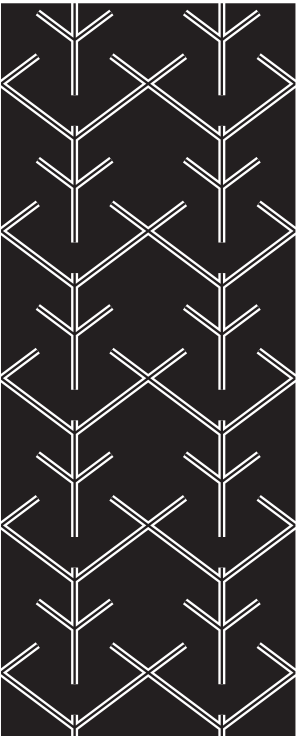

VERTEX














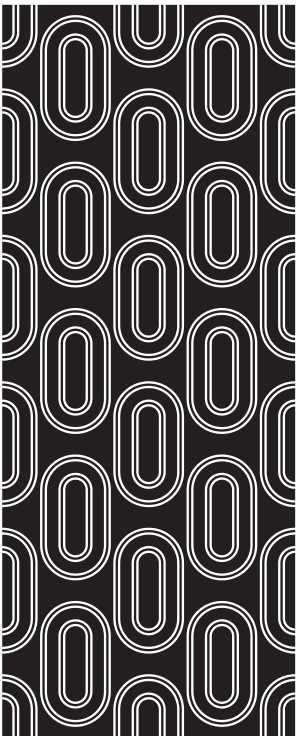


ZEN

COLOR GUIDE

9mm ArtFelt is the core material in our signature line of acoustic solutions.

Request samples to verify color as printers and monitors vary.

					
ECLIPSE	ASH	GRAPHITE	GREYSTONE	MIST	CRYSTAL
					
CASTLEWALL	ESPRESSO	MOCHA	MOSS	SPRING	SAGE
					
GRAPE	INDIGO	GLACIER	LAGOON	TROPICAL	GALVANIZED
					
WEATHERED	VINTAGE INDIGO	MYSTIC	STONE	SANDSTONE	SEASHELL
					
CARDINAL	CITRUS	TANGERINE	SOLAR	LEMON	
					
BIRCH	CEDAR	DARK OAK	DRIFTWOOD	MAPLE	WEATHERED WALNUT

HOW TO SPECIFY

Whether you have a specific product in mind or desire to craft a fully customized soundscape, our team is ready to bring your vision to life!

1

CHOOSE YOUR SOUND SOLUTION

Looking to elevate how you address sound mitigation in your space? Explore our range of wall, ceiling, and screen solutions to begin shaping your ideal soundscape.

2

REFINE THE DESIGN

Once you've selected your application and product, it's time to refine the design. Dive into our array of silhouettes, textures, patterns, and colors to customize your creation.

3

SHARE YOUR VISION

Whether you already have a product and design in mind or require a fully custom solution, reach out to an ARTIZIN specialist or fill out the quote form on our website. A team member will walk you through each step of the process.


4

GIVE US THE LOWDOWN

It's beneficial if you can provide our team with architectural drawings, field measurements, design inspiration, or design intent.

INSTALLATION

Stick to our straight forward installation guidance then kick back and revel in the acoustic paradise you’ve crafted.

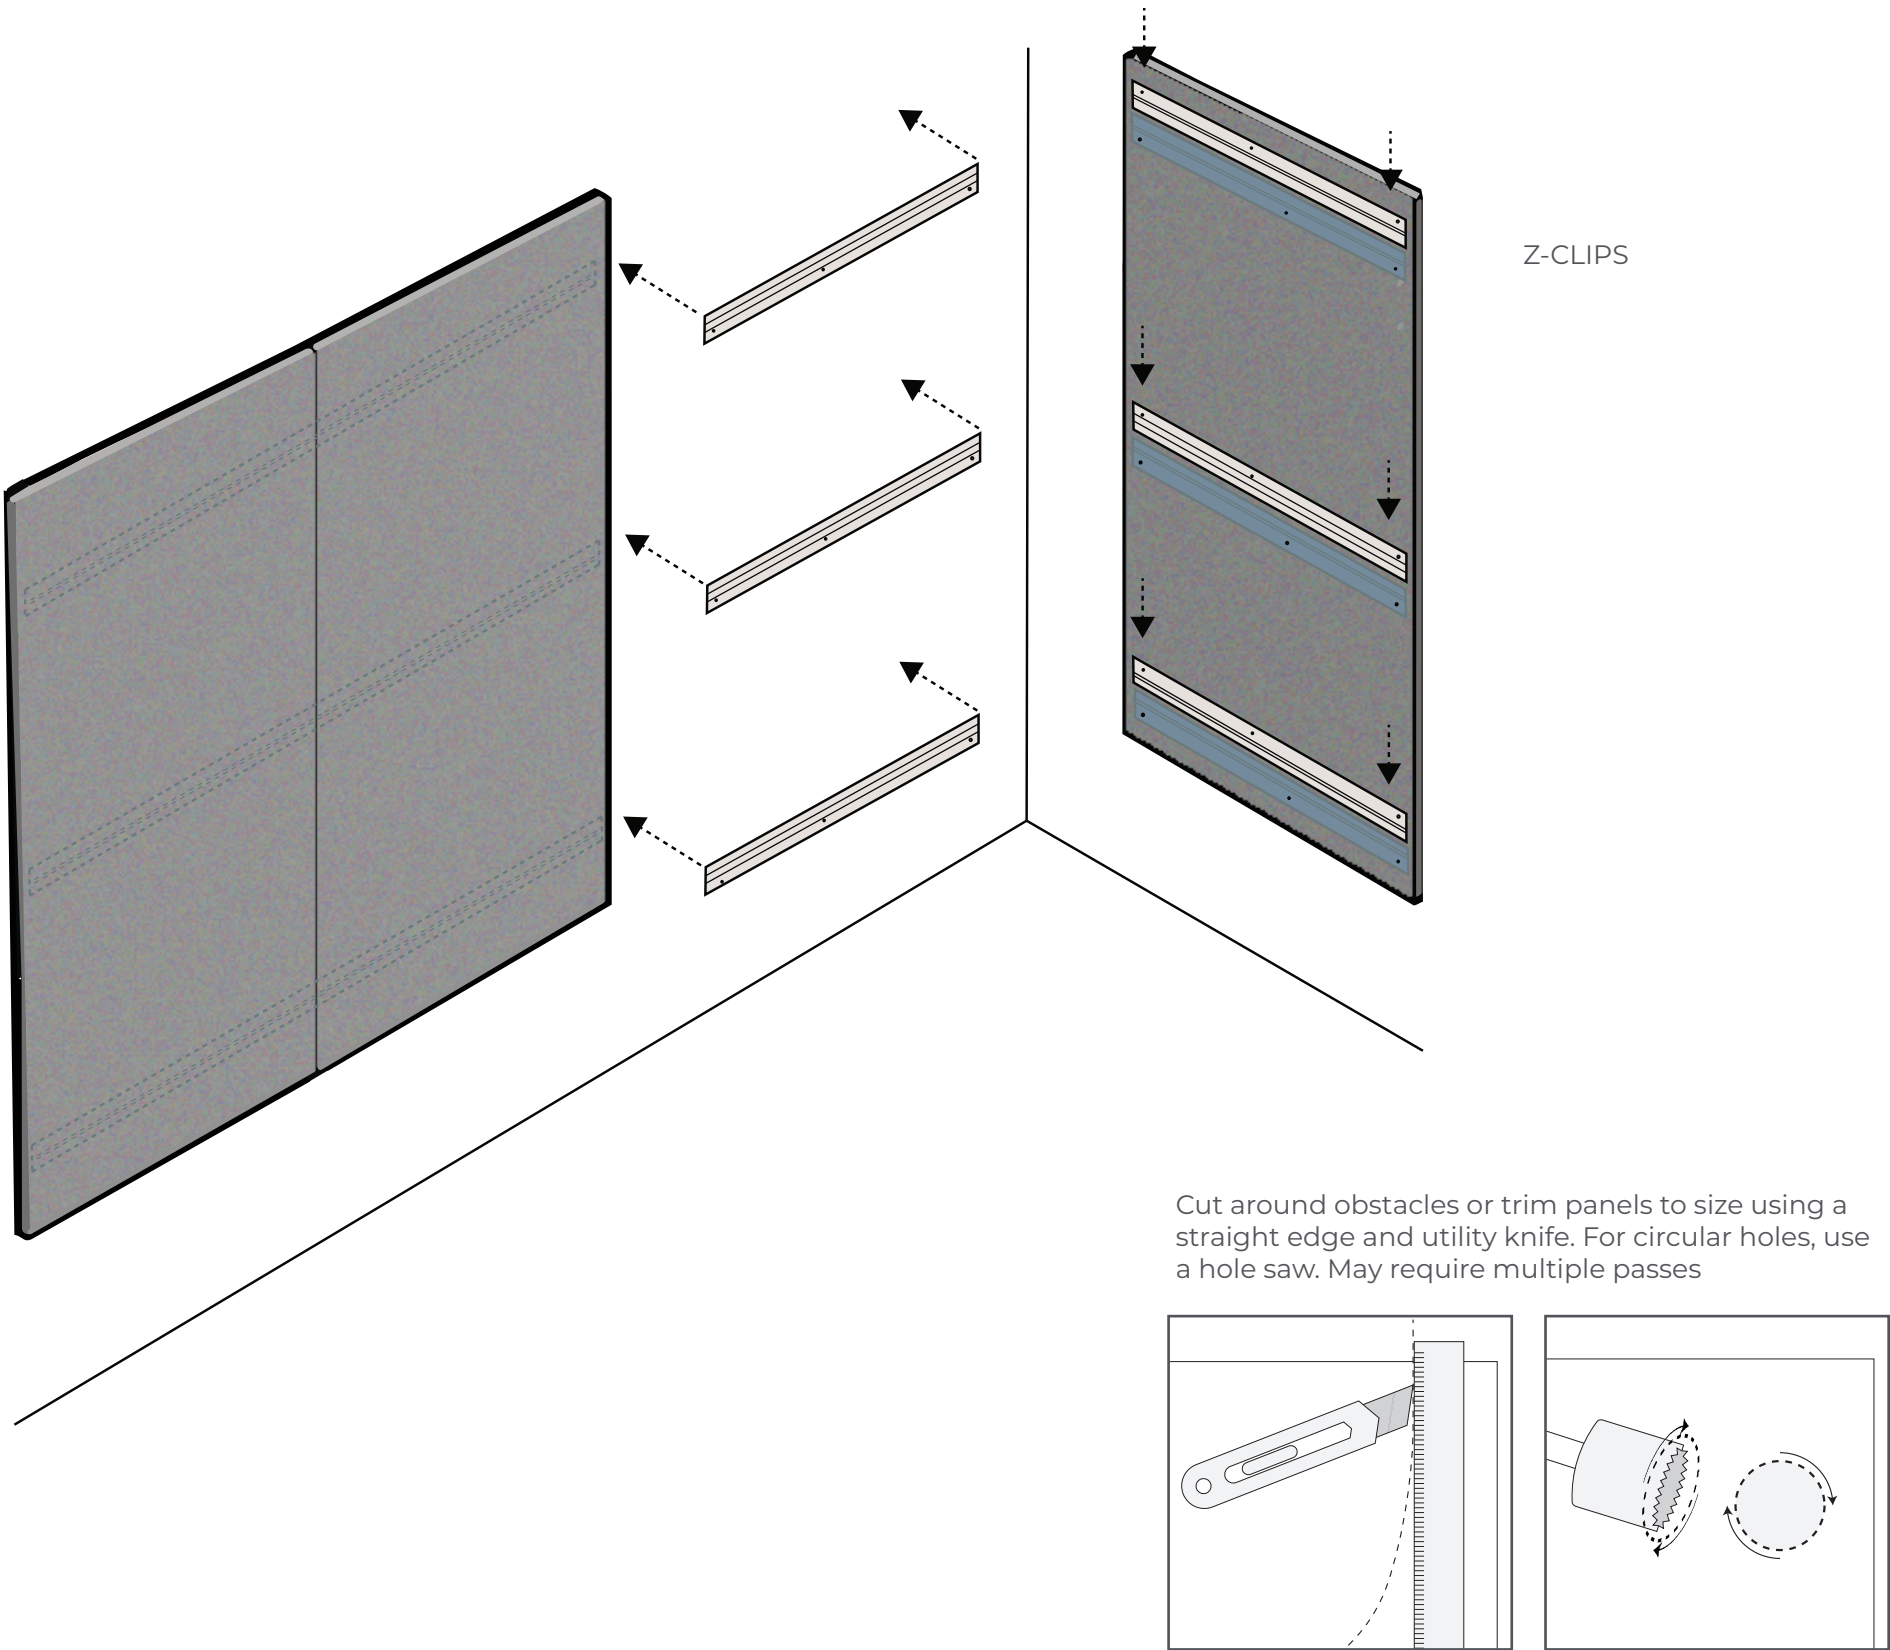


INSTALLATION

Stick to our straight forward installation guidance then kick back and revel in the acoustic paradise you’ve crafted.

DIRECT ADHESION INSTALL GUIDE

STEP 1

Apply a 1/4" bead of adhesive to the back of the panel, running along the left and right sides, 1" from the perimeter.

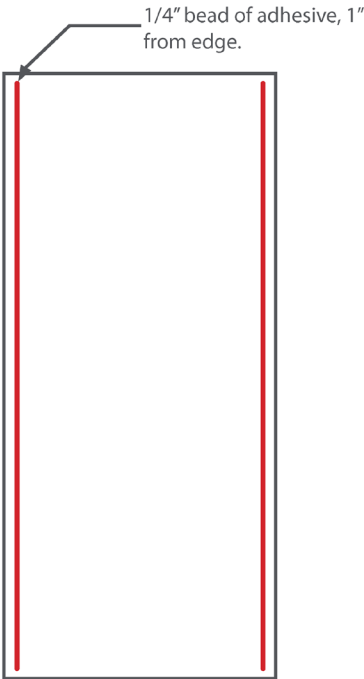


(BACK OF ARTFELT PANEL)


Recommended Liquid Nails N710 or N2000 Adhesive tubes applied to back side.

STEP 2

Apply a zig-zag or diagonal pattern of additional adhesive across the center sections of the panel.

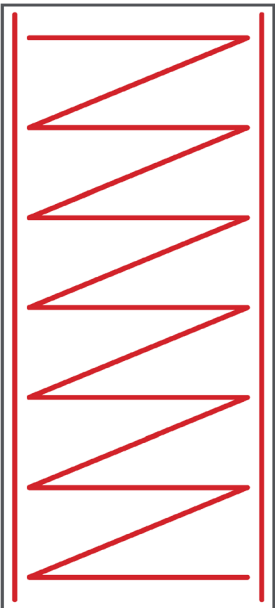

ZIG-ZAG PATTERN

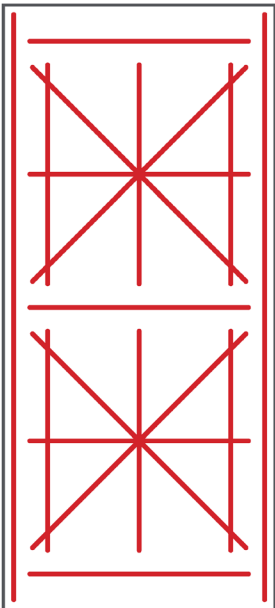


DIAGONAL PATTERN

STEP 3

Apply the panel to the substrate within 20 minutes smoothing over with firm pressure using open palm of hand.

- Use mechanical fasteners as needed to keep panel in place while adhesive dries

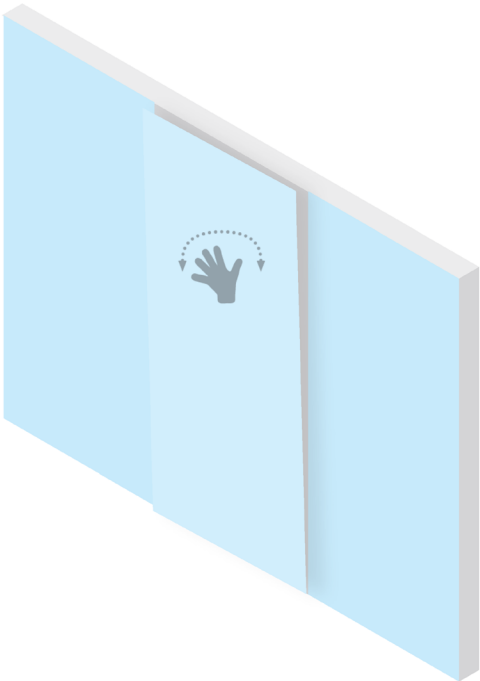

 **Apply within 20-Minutes**

Pro Tips:

- Only use recommended contact adhesives or low/solvent-free adhesives
- Do an adhesion mock test to make sure substrate will hold an adequate bond
- Cut, Scribe and dry fit all panels as needed

PRODUCT SPECIFICATIONS

The details make all the difference. Dive into The specifics that contribute to the overall quality and functionality of our products.

APPLICATION	Wall
MATERIAL	18mm ArtFelt
COMPOSITION	60% Recycled Polyester Fiber, 40% Virgin Fiber
DENSITY	3740g/m2
FORMALDEHYDE EMISSION	0.00ug/g
NRC RATING	0.60
FIRE TEST ASTM E 84-ISAN	Class A
SUSTAINABILITY	Recyclable, Certified Clean Air Gold by Intertek Sustainability
WARRANTY	5 Year Limited Warranty
SAFETY	DECLARE, Red List Free
LEAD TIME	3-5 weeks for Standard, Request Lead Time for Custom

GENERAL CARE

Vacuum as needed to remove dirt and dust. Use an air compressor for hard to reach areas.

STAIN REMOVAL

Blot spills and spots immediately with a clean, soft white dry cloth (do not use paper products). Avoid using solvents or concentrated abrasives to clean ArtFelt. Always test in an inconspicuous area first.

MILD STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mild solution of soap and warm water. Repeat using only clean water (no soap) to remove soap concentrate. Pat dry with a lint free cloth.

CHALLENGING STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mixed solution of household bleach and water (10% bleach I 90% water). Repeat using only clean water (no bleach) to remove bleach concentration. Pat dry with a lint free cloth.



CUSTOM

Connect with our team to design a fully custom solution. Through meticulous prototyping and the expertise of our skilled designers, we'll transform your vision into a tangible, personalized creation. Whether you're seeking intricate patterns, unique textures, or custom colors, we're here to translate ideas into inspired designs.