

WALL


# SOLID PANELS




# COLOR GUIDE

9mm ArtFelt is the core material in our signature line of acoustic solutions.

Request samples to verify color as printers and monitors vary.



ECLIPSE



ASH




GRAPHITE



GREYSTONE




MIST



CRYSTAL



CASTLEWALL



ESPRESSO




MOCHA



MOSS




SPRING



SAGE



GRAPE



INDIGO



GLACIER




LAGOON




TROPICAL




GALVANIZED



WEATHERED



VINTAGE INDIGO



MYSTIC



STONE



SANDSTONE



SEASHELL



CARDINAL



CITRUS




TANGERINE




SOLAR




LEMON



BIRCH




CEDAR




DARK OAK



DRIFTWOOD



MAPLE



WEATHERED WALNUT

# HOW TO SPECIFY

Whether you have a specific product in mind or desire to craft a fully customized soundscape, our team is ready to bring your vision to life!

1

## CHOOSE YOUR SOUND SOLUTION

Looking to elevate how you address sound mitigation in your space? Explore our range of wall, ceiling, and screen solutions to begin shaping your ideal soundscape.

2

## REFINE THE DESIGN

Once you've selected your application and product, it's time to refine the design. Dive into our array of silhouettes, textures, patterns, and colors to customize your creation.

3

## SHARE YOUR VISION

Whether you already have a product and design in mind or require a fully custom solution, reach out to an ARTIZIN specialist or fill out the quote form on our website. A team member will walk you through each step of the process.

4


## GIVE US THE LOWDOWN

It's beneficial if you can provide our team with architectural drawings, field measurements, design inspiration, or design intent.



# INSTALLATION

Use Z-Brackets or Adhesive to mount your panels then kick back and revel in the acoustic paradise you've crafted.

## Z-BRACKET INSTALL GUIDE

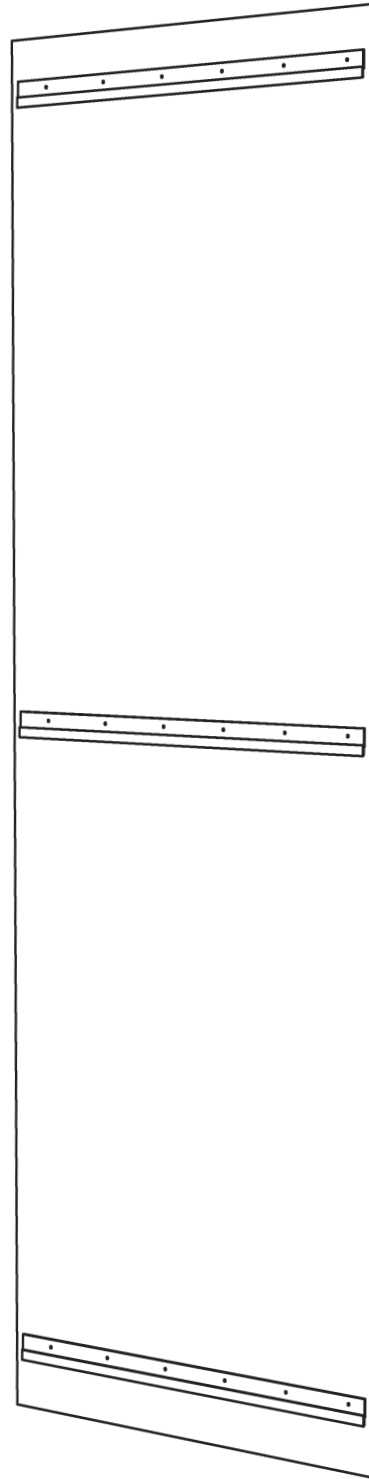

Cut around obstacles or trim panels to size using a straight edge and utility knife. For circular holes, use a hole saw.

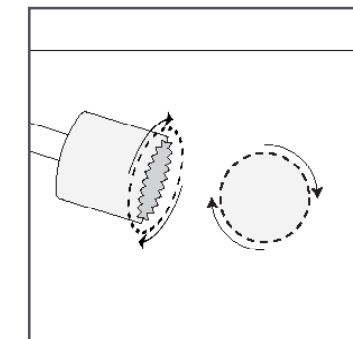


# INSTALLATION

Use Z-Brackets or Adhesive to mount your panels then kick back and revel in the acoustic paradise you’ve crafted.

## DIRECT ADHESION INSTALL GUIDE

### STEP 1

Apply a 1/4" bead of adhesive to the back of the panel, running along the left and right sides, 1" from the perimeter.

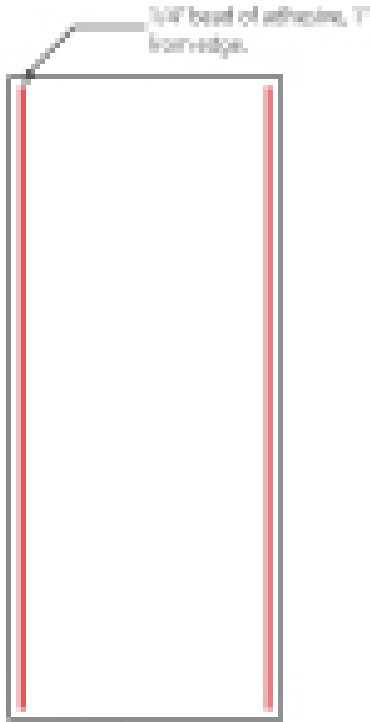


(BACK OF ARTIST PANEL)


Recommended Liquid Nails-MT30 or PL2000 Adhesive tubes applied to back side.

### STEP 2

Apply a zig-zag or diagonal pattern of additional adhesive across the center sections of the panel.

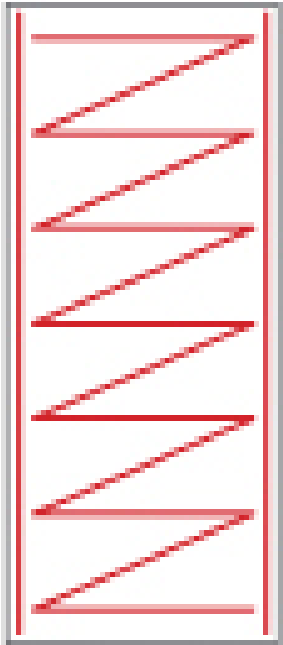

(ZIG-ZAG PATTERN)

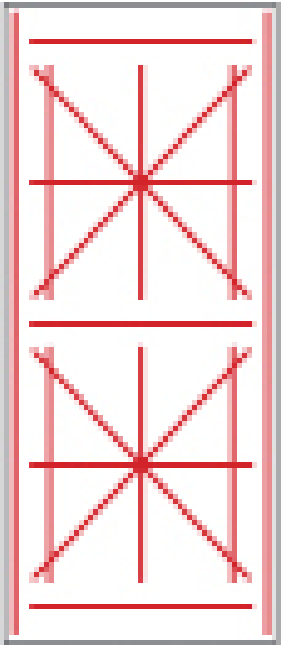


(DIAGONAL PATTERN)

### STEP 3

Apply the panel to the substrate within 20 minutes, smoothing over with firm pressure using open palm of hand.

- Use mechanical fasteners as needed to keep panel in place while adhesive cures.

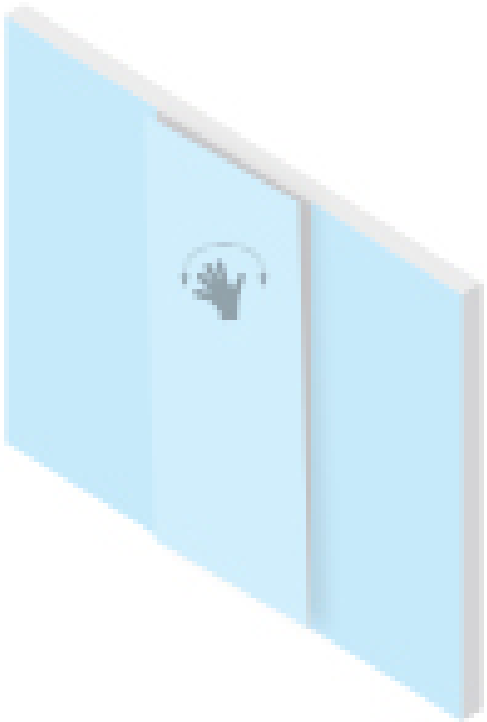

 Apply within 20-Minutes

### PRO TIPS:

- Only use recommended contact adhesives or low/solvent-free adhesives
- Do an adhesion mock test to make sure substrate will hold an adequate bond
- Cut, scribe and dry fit all panels as needed

# PRODUCT SPECIFICATIONS

The details make all the difference. Dive into The specifics that contribute to the overall quality and functionality of our products.

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| APPLICATION              | Wall                                                            |
| MATERIAL                 | 9mm ArtFelt                                                     |
| COMPOSITION              | 60% Recycled Polyester Fiber, 40% Virgin Fiber                  |
| DENSITY                  | 2000g/m2                                                        |
| FORMALDEHYDE EMISSION    | 0.00ug/g                                                        |
| NRC RATING               | 0.30-0.60                                                       |
| FIRE TEST ASTM E 84-ISAN | Class A                                                         |
| SUSTAINABILITY           | Recyclable, Certified Clean Air Gold by Intertek Sustainability |
| WARRANTY                 | 5 Year Limited Warranty                                         |
| SAFETY                   | DECLARE, Red List Free                                          |
| LEAD TIME                | 3-5 weeks for Standard, Request Lead Time for Custom            |

## GENERAL CARE

Vacuum as needed to remove dirt and dust. Use an air compressor for hard to reach areas.

## STAIN REMOVAL

Blot spills and spots immediately with a clean, soft white dry cloth (do not use paper products). Avoid using solvents or concentrated abrasives to clean ArtFelt. Always test in an inconspicuous area first.

## MILD STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mild solution of soap and warm water. Repeat using only clean water (no soap) to remove soap concentrate. Pat dry with a lint free cloth.

## CHALLENGING STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mixed solution of household bleach and water (70% bleach I 90% water). Repeat using only clean water (no bleach) to remove bleach concentration. Pat dry with a lint free cloth.



## CUSTOM

Connect with our team to design a fully custom solution. Through meticulous prototyping and the expertise of our skilled designers, we'll transform your vision into a tangible, personalized creation. Whether you're seeking intricate patterns, unique textures, or custom colors, we're here to translate ideas into inspired designs.