

WALL

SLAT PANELS



Slat Panels offer the elegance of real wood slats with the added benefit of exceptional acoustical performance, helping to reduce noise and create quieter, more comfortable spaces. Choose from six meticulously crafted wood grains that replicate the authenticity of real wood, combined with the practicality and sound-absorbing properties of ArtFelt™.

If you prefer the Slat design in one of our standard ArtFelt colors, that option is available as well.



PATTERNS

Crafted with precision, slats are a sleek 1.25” width with .5” spacing for a clean, modern silhouette. Available in both vertical and horizontal orientations, Slat Panels can be customized to fit your design vision. Choose from our six wood grains, paired with a black backer for added depth, or opt for a tone-on-tone ArtFelt color option if that better suits your space.

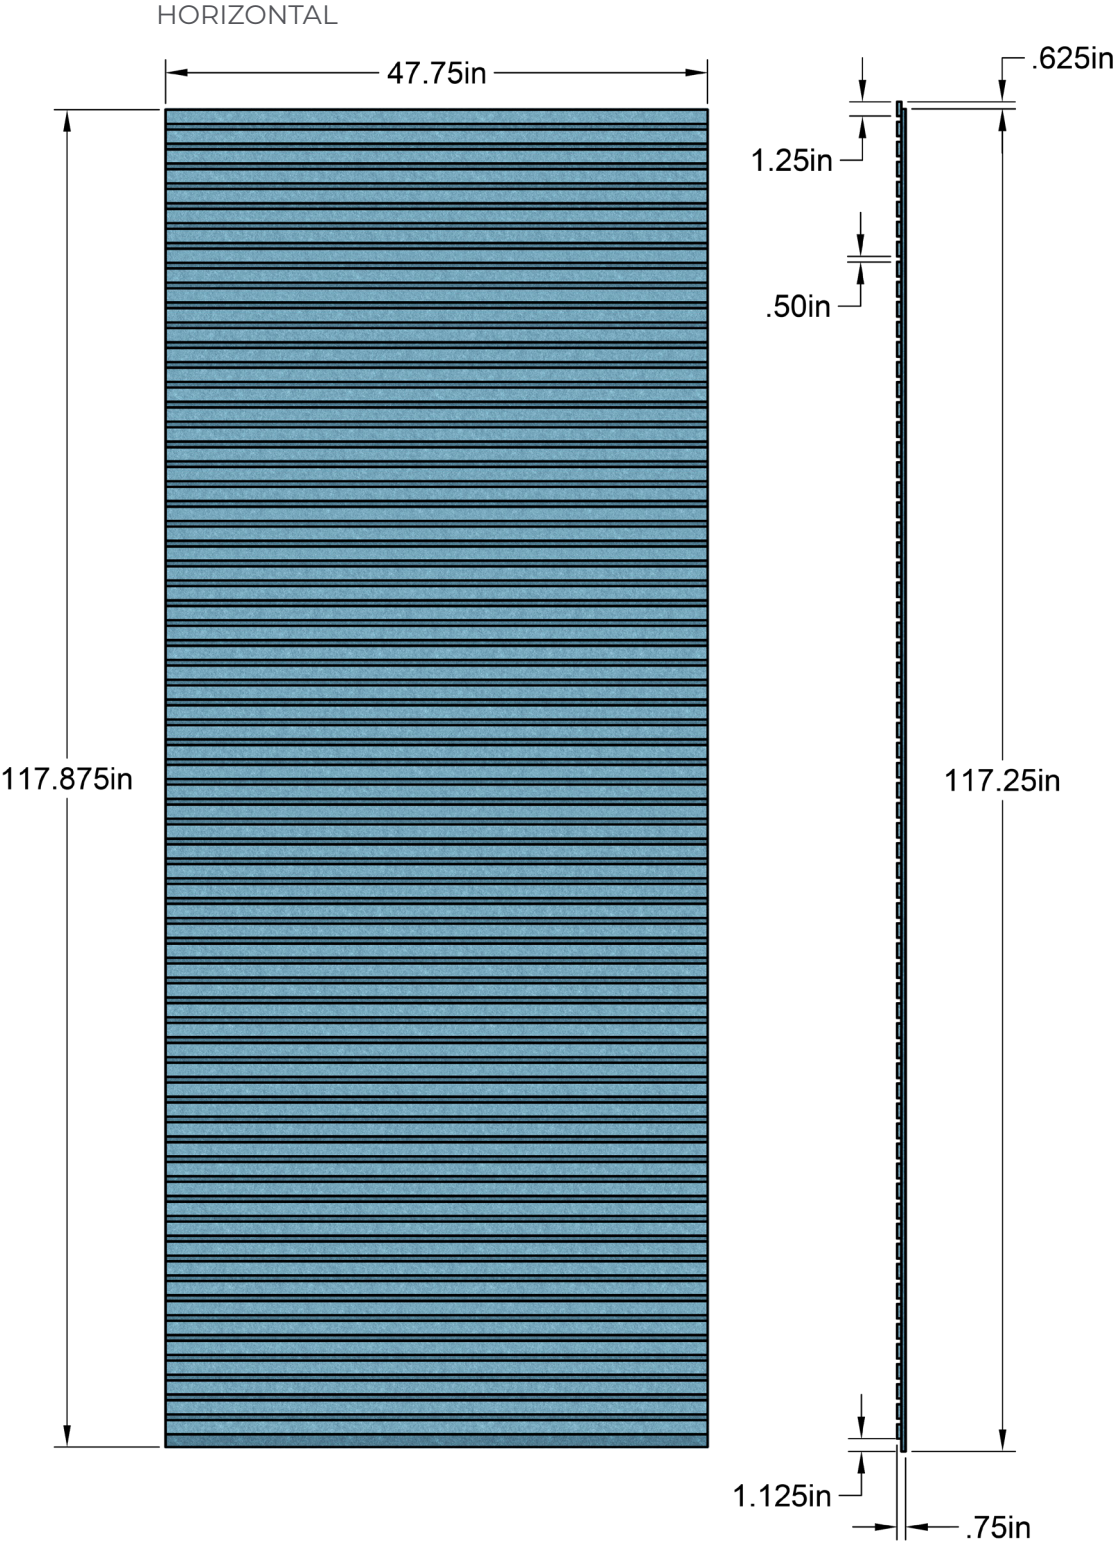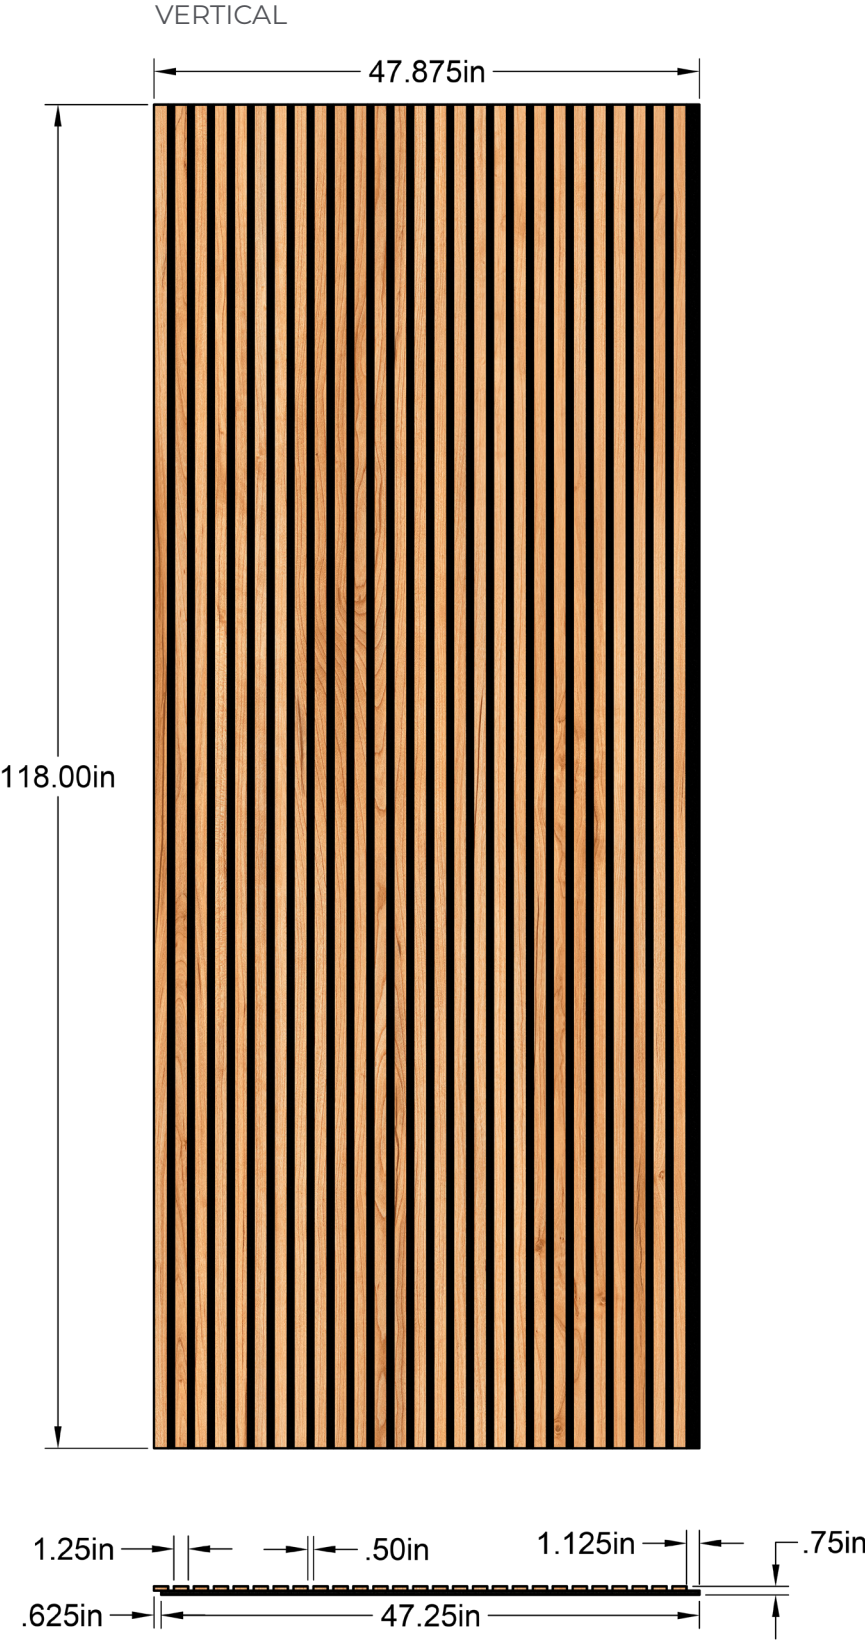

COLOR GUIDE

9mm ArtFelt is the core material in our signature line of acoustic solutions.

Request samples to verify color as printers and monitors vary.




CRYSTAL



SANDSTONE



MARIGOLD




SPRING



TROPICAL



SEASHELL



MIST



MOCHA



LEMON




MOSS



LAGOON




STONE



GREYSTONE




SPICE



SOLAR




CLOVER



MYSTIC



GALVANIZED




GRAPHITE




SIENNA



TANGERINE




BALTIC



WEATHERED



GLACIER




ASH




ESPRESSO



CITRUS




SAGE




VINTAGE INDIGO



GRAPE



ECLIPSE



MERLOT




CARDINAL




CASTLEWALL




INDIGO




BIRCH




CEDAR




DARK OAK



DRIFTWOOD



MAPLE



WEATHERED WALNUT

HOW TO SPECIFY

Whether you have a specific product in mind or desire to craft a fully customized soundscape, our team is ready to bring your vision to life!

1

CHOOSE YOUR SOUND SOLUTION

Looking to elevate how you address sound mitigation in your space? Explore our range of wall, ceiling, and screen solutions to begin shaping your ideal soundscape.

2

REFINE THE DESIGN

Once you've selected your application and product, it's time to refine the design. Dive into our array of silhouettes, textures, patterns, and colors to customize your creation.

3

SHARE YOUR VISION

Whether you already have a product and design in mind or require a fully custom solution, reach out to an ARTIZIN specialist or fill out the quote form on our website. A team member will walk you through each step of the process.


4

GIVE US THE LOWDOWN


It's beneficial if you can provide our team with architectural drawings, field measurements, design inspiration, or design intent.

INSTALLATION

Stick to our straight forward installation guidance then kick back and revel in the acoustic paradise you’ve crafted.

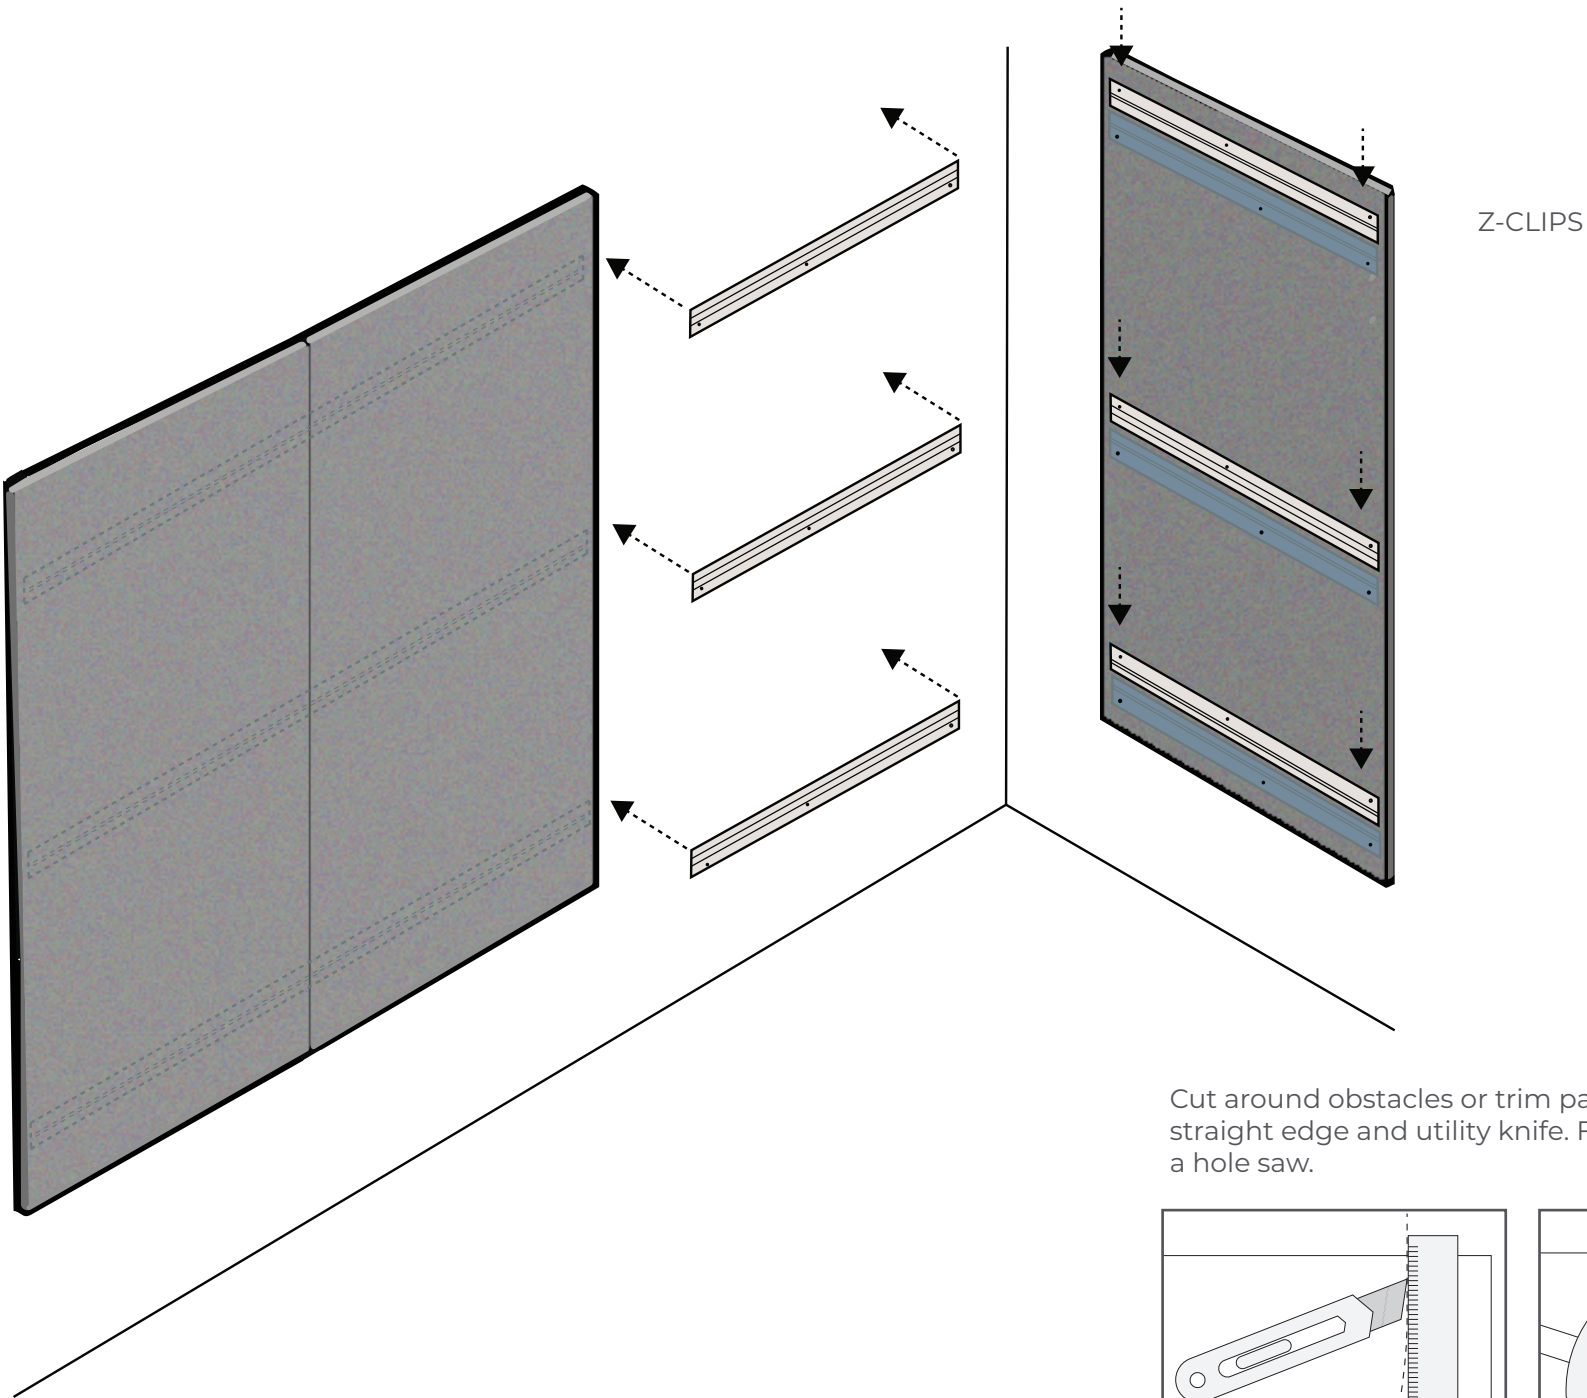

Cut around obstacles or trim panels to size using a straight edge and utility knife. For circular holes, use a hole saw.

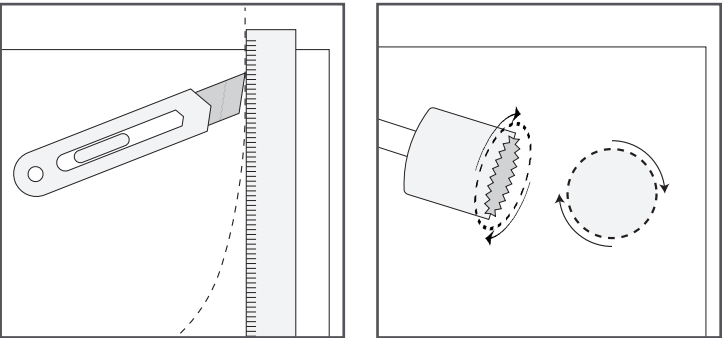


INSTALLATION

Stick to our straight forward installation guidance then kick back and revel in the acoustic paradise you’ve crafted.

DIRECT ADHESION INSTALL GUIDE

STEP 1

Apply a 1/4” bead of adhesive to the back of the panel, running along the left and right sides, 1” from the perimeter.

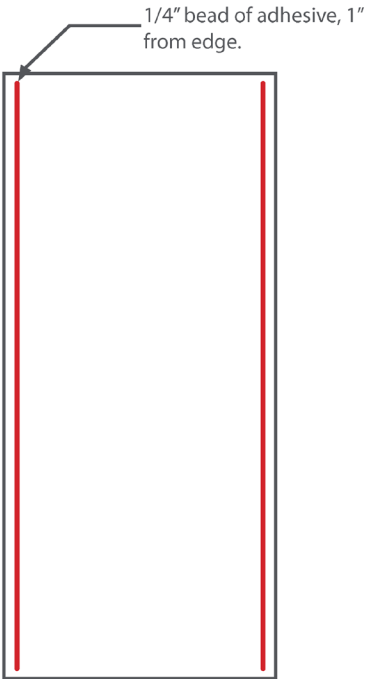


(BACK OF ARTFELT PANEL)


Recommended Liquid Nails N710 or N2000 Adhesive tubes applied to back side.

STEP 2

Apply a zig-zag or diagonal pattern of additional adhesive across the center sections of the panel.

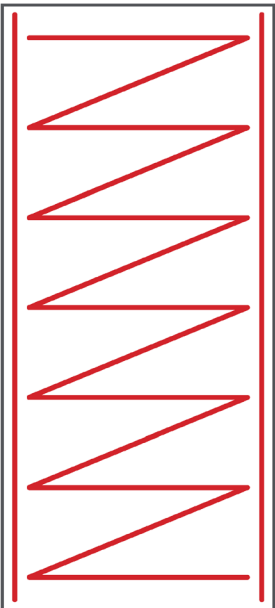

ZIG-ZAG PATTERN

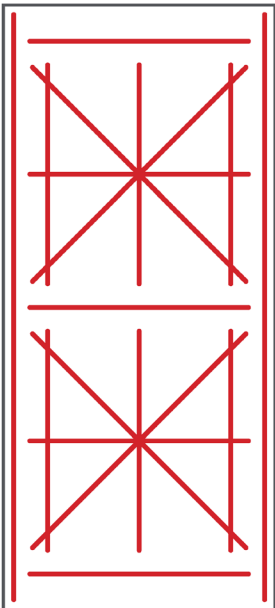


DIAGONAL PATTERN

STEP 3

Apply the panel to the substrate within 20 minutes smoothing over with firm pressure using open palm of hand.

- Use mechanical fasteners as needed to keep panel in place while adhesive dries

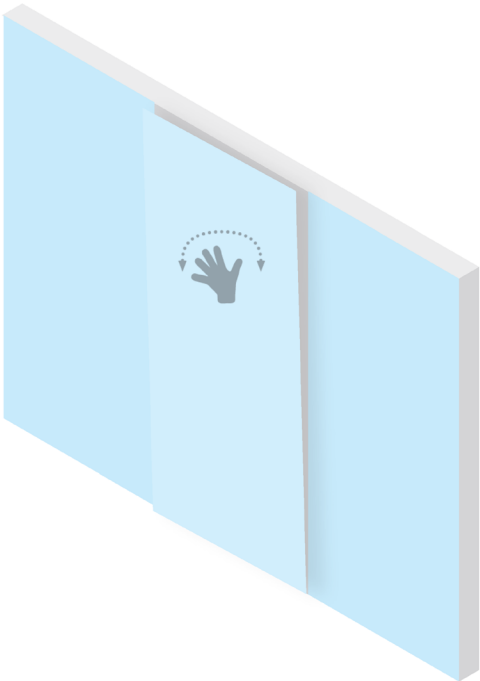

Apply within
20-Minutes

Pro Tips:

- Only use recommended contact adhesives or low/solvent-free adhesives
- Do an adhesion mock test to make sure substrate will hold an adequate bond
- Cut, Scribe and dry fit all panels as needed

PRODUCT SPECIFICATIONS

The details make all the difference. Dive into The specifics that contribute to the overall quality and functionality of our products.

APPLICATION	Wall
MATERIAL	9mm ArtFelt
COMPOSITION	60% Recycled Polyester Fiber, 40% Virgin Fiber
DENSITY	2000g/m2
FORMALDEHYDE EMISSION	0.00ug/g
NRC RATING	0.60
FIRE TEST ASTM E 84-ISAN	Class A
SUSTAINABILITY	Recyclable, Certified Clean Air Gold by Intertek Sustainability
WARRANTY	5 Year Limited Warranty
SAFETY	DECLARE, Red List Free
LEAD TIME	3-5 weeks for Standard, Request Lead Time for Custom

GENERAL CARE

Vacuum as needed to remove dirt and dust. Use an air compressor for hard to reach areas.

STAIN REMOVAL

Blot spills and spots immediately with a clean, soft white dry cloth (do not use paper products). Avoid using solvents or concentrated abrasives to clean ArtFelt. Always test in an inconspicuous area first.

MILD STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mild solution of soap and warm water. Repeat using only clean water (no soap) to remove soap concentrate. Pat dry with a lint free cloth.

CHALLENGING STAIN REMOVAL

Blot ArtFelt with a clean, soft white cloth dampened with a mixed solution of household bleach and water (70% bleach I 90% water). Repeat using only clean water (no bleach) to remove bleach concentration. Pat dry with a lint free cloth.



CUSTOM

Connect with our team to design a fully custom solution. Through meticulous prototyping and the expertise of our skilled designers, we'll transform your vision into a tangible, personalized creation. Whether you're seeking intricate patterns, unique textures, or custom colors, we're here to translate ideas into inspired designs.